



ARTICLE NO. / DESCRIPTION	CAPACITY	TYPE	MODEL	INSTALLATION
37010200 / INV-IB 200	200L	PRESSURIZED	INDIRECT BOILER	FLOOR STANDING


version.3

### constructive specifications

capacity	200L
tank material	RVS / stainless steel AISI 444 (EN 1.4521)
thermal insulation	PUR / polyurethane foam 50mm thickness, CFC-Free and HCFC-Free
casing	painted galvanized carbon steel DX51D
temperature gauge	0 - 120°C
coils material and connections	RVS / stainless steel AISI 316L
coil surface area	0,95m <sup>2</sup>
coil kW rating output 85/65°C	29kW
max. operating pressure	8bar (0,8MPa)
test pressure	12bar (1,2MPa)
maximum working temperature	90°C
heating element (optional)	immersion connection 1½"
weight (empty / full)	52kg / 248kg
heat losses	77W (EN 12897)
ErP class	C

### connections and dimensions

#### connections

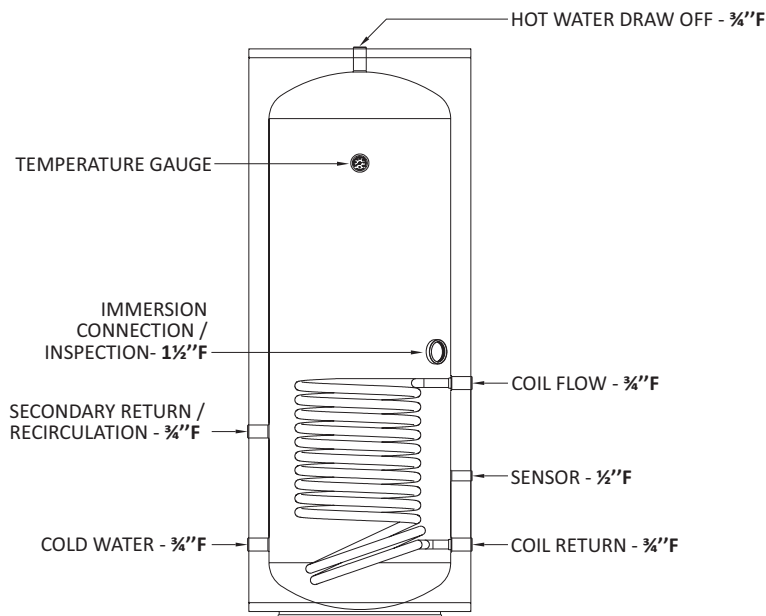

#### dimensions

