



inventum

TECHNICAL FILE

100L SHIFT LOAD BOILER AA



ARTICLE NO. / DESCRIPTION	CAPACITY	TYPE	MODEL	INSTALLATION
30003010 / INV - SL 100 - AA LDX	100L	PRESSURIZED	SHIFT LOAD BOILER AA	FLOOR STANDING


version.1

constructive specifications

storage capacity	100L
tank material	RVS / stainless steel DUPLEX LDX 2101 (EN 1.4162)
thermal insulation	PUR / polyurethane foam 50mm thickness, CFC-Free and HCFC-Free
casing	painted galvanized carbon steel DX51D
max. operating pressure	6bar (0,6MPa)
test pressure	12bar (1,2MPa)
maximum working temperature	85°C
weight (empty / full)	28kg / 128kg
heat losses	47W (EN 12897)
ErP class	B
internal code	68.100.DI.03

connections and dimensions

connections

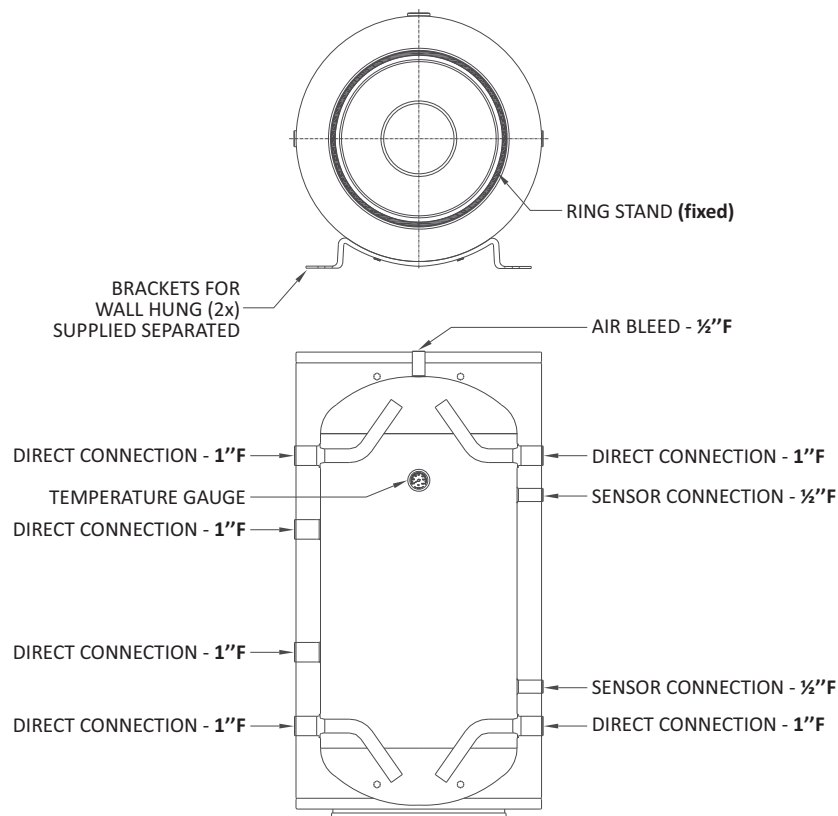

dimensions

