
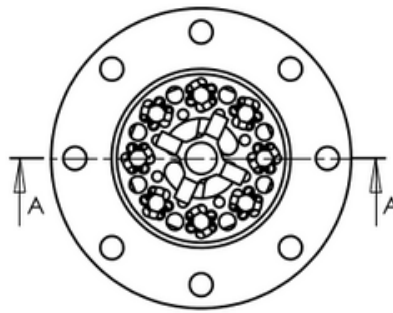


HYW b]gW Y'zW Y

5 bh!_U_

EF-i150

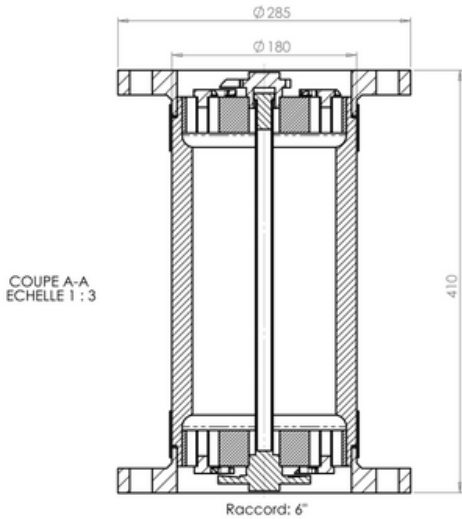

| | |
|--------------------------------------|-----------------------|
| Ü^A!^} @ | EF-i150 |
| Š&@& • { æ^i&æ& | INOX 316L |
| P[{ q æ^i&æ& ^e! | DN150 |
| V^ ^A^!a& a& * | Flensdiameter 285 mm |
| O& æ&æ& ^e!^! ^} q ^! ^! ^! ^! • | 8 / 18mm |
| O• æ& æ& •• ^! ^! ^} q ^! ^! ^! • | 240 mm |
| Ö! [[æ^i&æ& a& * | 6" |
| Ó @ æ^i&æ& *• &æ& æ&æ& æ | 4750 l/min |
| T æ&æ& æ^i&æ& @ æ^i&æ& *• &æ& æ&æ& æ | 285 m ³ /h |
| Ö! \ç^!a: ^} ^! ^! æ&æ& æ&æ& a&c | 265 mbar |
| T æ&æ& æ^i&æ&] ^!æ&~! | 155°C |
| T q æ^i&æ&] ^!æ&~! | -20°C |
| T æ&æ& æ^i&æ& \ | 25 bars |
| V[æ&æ& } * e | 410 mm |
| Ó æ&æ& æ&æ& ^e! | 180 mm |
| Ö^, æ&æ& | 43 kg |

